
OAK SUMMIT® COLLECTION



Self-expression shouldn't cost a fortune. With Amarr's

Oak Summit Collection, it won't. These durable steel doors offer an attractive carriage house look. Choose from a variety of door colors, decorative hardware, and window accents. Customize your home with Amarr's most affordable carriage house door.



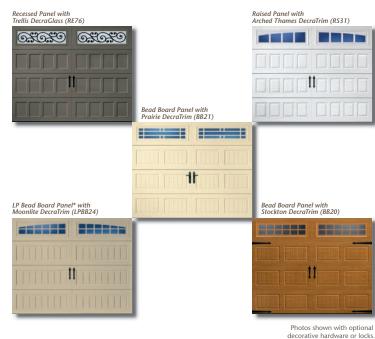

PANEL DESIGNS

BB • BEAD BOARD PANEL	LPBB • LP BEAD BOARD PANEL*	RE • RECESSED PANEL	RS • RAISED PANEL
		THE RECESSES TARKE	

OAK SUMMIT® COLLECTION

Construction







STEEL

1000

Single-Layer: Steel

Get value and durability with an Oak Summit 1000 single-layer steel door. These heavy-duty steel doors are durable, reliable, and low maintenance.

- Heavy-Duty Exterior Steel
- Durable, Reliable, Low Maintenance

Vinvl-Coated Steel Exterior

2000

Double-Layer: Steel + Insulation

An Oak Summit 2000 double-layer door provides durable, low maintenance features, plus a layer of vinyl-coated insulation for increased thermal properties and quieter operation.

- Heavy-Duty Exterior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation with Vinyl Backing
- Energy Efficient
- Quiet Operation

Polystyrene Insulation


3000

Triple-Layer: Steel + Insulation + Steel For the toughest, energy-efficient steel door, an Oak Summit 3000 triple-layer door includes the ultimate in thermal properties, plus a layer of steel for a finished interior look and added durability.


- Heavy-Duty Exterior and Interior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation
- Superior Energy Efficiency
- Extra Quiet Operation

Options

DECRATRIM WINDOW INSERTS




$D E C R A G L A S S^{TM} W I N D O W S$ Tempered obscure glass with baked-on ceramic designs.



DECORATIVE HARDWARE & LOCK

A L U M I N U M Aluminum hinges with clavos not recommended for arched openings

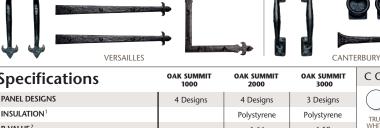

Specifications	OAK SUMMIT 1000	OAK SUMMIT 2000	OAK SUMMIT 3000
PANEL DESIGNS	4 Designs	4 Designs	3 Designs
INSULATION ¹		Polystyrene	Polystyrene
R-VALUE ²		6.64	6.58
STEEL THICKNESS	25 ga	25 ga	27/27 ga
Gauge (mm)	0.53mm	0.53mm	0.42/0.42mm
DOOR THICKNESS	2" (5.1cm)	2" (5.1cm)	1 3/8" (3.4cm)
WINDOW GLASS OPTIONS			
3/32" (0.24cm) Single Strength	•	•	•
Obscure	•	•	•
Insulated			•
WIND LOAD AVAILABLE ³	•	•	•
PAINT FINISH ⁴ WARRANTY	15 Years	25 Years	Lifetime
WORKMANSHIP/HARDWARE4 WARRANTY	1 Year	2 Years	3 Years



COL	ORS							vary from sam	
TRUE WHITE	ALMOND	WICKER TAN	SANDTONE	TERRATONE	DARK BROWN	HUNTER GREEN	GRAY	DARK WOODGRAIN*	MEDIUM WOODGRAIN*

Oak Summit 1000/2000: True White, Almond, Wicker Tan, Sandtone, Terratone, and Dark Brown

*Price Upcharae



165 Carriage Court Winston-Salem, NC 27105

800 503 DOOR www.amarr.com



Your Local Amarr Dealer:

¹ All insulation has passed fire safety testing.

R-value is in accordance with DASMA TDS-163.

Alt is your responsibility to make sure your garage door meets local building codes.

4 For complete warranty details, make sure your garage door meets local building codes.